


PROPRIETARY INFORMATION:
 PROPRIETARY OF GLOBTEK, INC. ANY REPRODUCTION, DISCLOSURE OR
 USE OF THIS DRAWING IN WHOLE OR IN PART IS HEREBY
 PROHIBITED EXCEPT AS SPECIFIED IN WRITING BY GLOBTEK, INC.

REV	DESCRIPTION	DATE	APPROVED
A	INITIAL RELEASE, RFS.3291, EM	03/19/04	BS

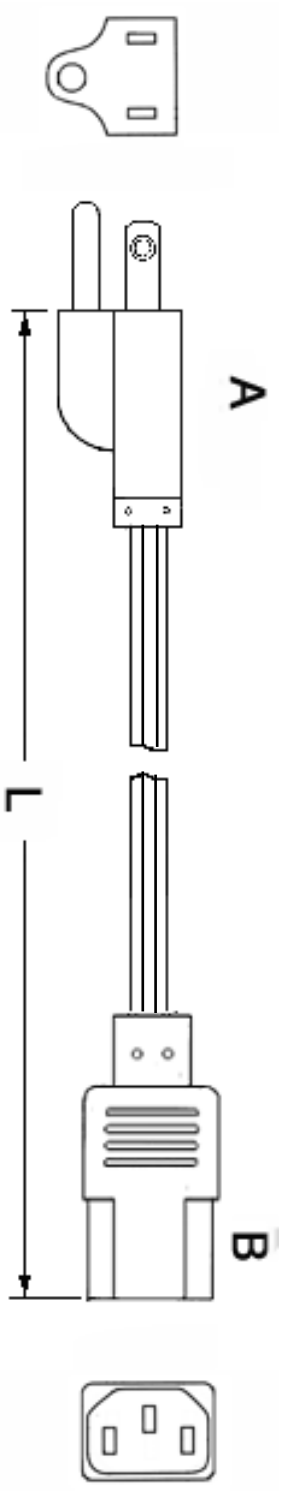

GENERAL SPECIFICATIONS:

RATING: 10A / 125V AC
CABLE TYPE / SIZE: 3 X 18 AWG / SPT-1
TEMPERATURE RATING: 105° C
CONDUCTOR COLORS: BLACK / BLACK-RIBBED / GREEN
CABLE JACKET COLOR: BLACK
OVERALL LENGTH (L): 2440 ± 80 mm (8 Ft)
CABLE OUTER DIAMETER: 2.7 x 8.0 ± 0.15 mm (0.106 x 0.315 inch)
END 'A' TERMINATION: NEMA 5-15P
END 'B' TERMINATION: IEC 320 /C13
APPROVALS PLUG: UL, CSA or cUL
APPROVALS CABLE: UL, CSA or cUL

PACKING:
 BULK PACKED, BUNDLES OF 25.
 MAXIMUM SHIPPING CARTON WEIGHT IS 30 KG.

NOTES:
 1. CORD, PLUG AND CONNECTOR MUST BE MARKED WITH APPROVALS SYMBOLS OR FILE NUMBER(S).



DASH NO.	PART NO	REV.	DESCRIPTION	NOTES
TABULATION BLOCK				

REV	A	DATE:	TOLERANCES:	SIZE	MODEL:	REV.
SHEET	1		DECIMALS ANGULAR xx +/- .01 .xx +/- .005	+		A
INTTBY:	EM	DATE:	MILLIMETERS ANGULAR .xx +/- .03 xxx +/- .013	+/- 1°		

DRAWN:	NF	DATE:	FSCN No.:	G, CC	SCALE:	NONE	PART NO:	3021468F0701	SHEET	1/1
APRVD:	DMR	DATE:								

Foot Note:
 Globtek Inc. will not be liable for the safety and performance of these power product if unauthorized access and repair occurs. End user should consult the applicable UL, CSA or EN Standards for proper installation instruction.

Limitation of Use:
 Globtek product are not authorized for use as mission critical components in life support, hazardous environment, nuclear or aircraft applications without prior written approval from the CEO of Globtek Inc.

Contents of this document are subject to change without prior notice

GlobTek, Inc.
www.globtek.com
 186 Veterans Dr. Northvale, NJ 07647
 Tel 201-784-1000 Fax 201.784.0111